

ASE 9575P-HQ-DOD



SECURE SLEEVE

ASE Docking Station:
ASE-9575P-HQ-DOD

www.ase-corp.com



ASE-9575P-HQ-DOD		
Voltage	10-32 VDC	Cable or DC Adapter
Power	12 Watts	Active Peak
Antenna Connections	Iridium TNC-F	GPS SMA-F
Operating Temp	-10 to 55 C	
Dimensions	13 x 6 x 4.5 in.	33 x 15 x 11.5 cm
Weight	3.5 lbs.	1.6 kg
Shipping Weight	6.0 lbs.	2.7 kg
Shipping Dimensions	16 x 14 x 8 in.	41 x 36 x 20 cm

IRIDIUM 9575 A SECURE SLEEVE DOCKING STATION

rev 0.01

ADDITIONAL FEATURES/COMPONENTS




Easy Office Integration
 Use with Analog Phones
We Recommend ASE-PT01 with Dialing Instructions.



Antennas go the Distance
 Passive Antennas up to 20 Meters. Active Antennas up to 105M
Antennas not included- Purchase separately.

EXAMPLE INSTALLATION

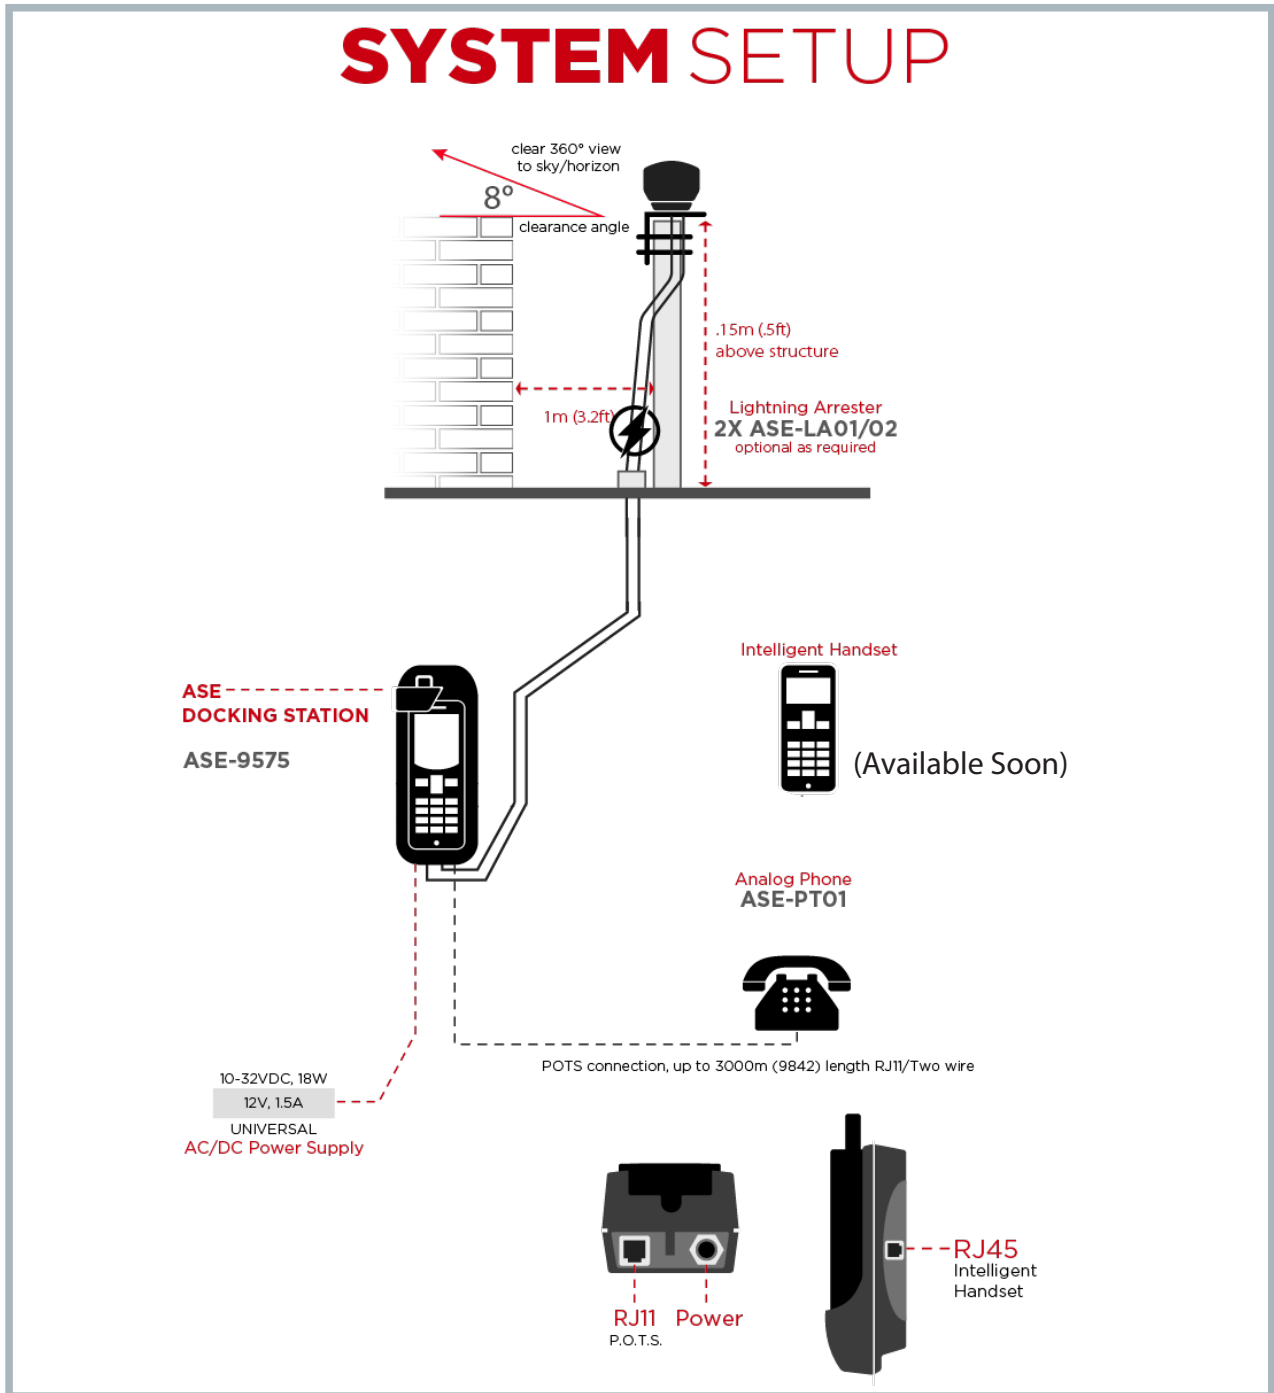

BEARCAT INSTALLATION DIAGRAM

9575A PACKAGES AND COMPONENTS-HQ

Shipping Information

**ASE-9575P-
HQ-DOD**

Standard/Push to Talk Docking Station with POTS and GPS - includes dock, office mount.
RECOMMENDED FOR VOICE OR INTEGRATE WITH OFFICE PHONE applications

Harmonized Code - HTS#: 8518.30.2000 ECCN: EAR99
Shipping Dimensions: 16 x 14 x 8, 6 LBS (41cm x 36cm x 20cm, 3 kg)



ASE-PT01

POTS Station - includes POTS phone, mount plate, and instruction placard

Harmonized Code - HTS#: 8518.30.2000 ECCN: EAR99
Shipping Dimensions: 16 x 14 x 8, 5 LBS (41cm x 36cm x 20cm, 2 kg)



ASE ANTENNA AND CABLE OPTIONS:

CABLE LENGTHS and ANTENNA OPTIONS:



ASE-PFA12 - 39' (12 meters) LMR600
- premium passive filtered antenna, lightning arrester, and mounting bracket

ASE-PFA20 - 66' (20meters) LMR600
- premium passive filtered antenna, lightning arrester, and mounting bracket

ASE-PFA27 - 100' (27 meters) LMR200
- premium active filtered antenna, lightning arrester, interface box, and mounting bracket

ASE-PFA40 - 131' (40 meters) RG213
- premium active filtered antenna, lightning arrester, interface box, and mounting bracket

ASE-PFA70- 230' (70 meters) LMR400
- premium active filtered antenna, lightning arrester, interface box, and mounting bracket

ASE-PFA88 - 289' (88 meters) LMR500
- premium active filtered antenna, lightning arrester, interface box, and mounting bracket

ASE-PFA105 - 344' (105 meters) LMR600
- premium active filtered antenna, lightning arrester, interface box, and mounting bracket

ASE-FA12 - 39' (12 meters) LMR400
- passive antenna, and mounting bracket

ASE-FA20 - 65' (20 meters) LMR600
- passive antenna, and mounting bracket



ASE-LA01

Lightning Arrester - for active antenna

Harmonized Code - HTS#: 8517.70.0000 ECCN: EAR99
Shipping Dimensions: 8 x 8 x 8, 2 LBS (20cm x 20cm x 20cm, 1 kg)



Contact ASE

ASE-HEADQUARTERS

16559 N. 92nd Street
Scottsdale, Arizona
85260
USA

Phone +1 480 443 1424

E-mail info@ase-corp.com

ASE-INTERNATIONAL

Galway
Republic of Ireland

Phone +353 85 761 5506

E-mail info@ase-corp.com



www.ase-corp.com

ASE
APPLIED SATELLITE ENGINEERING